


Compaq 15MHz ESDI Controller

Default Jumper Settings

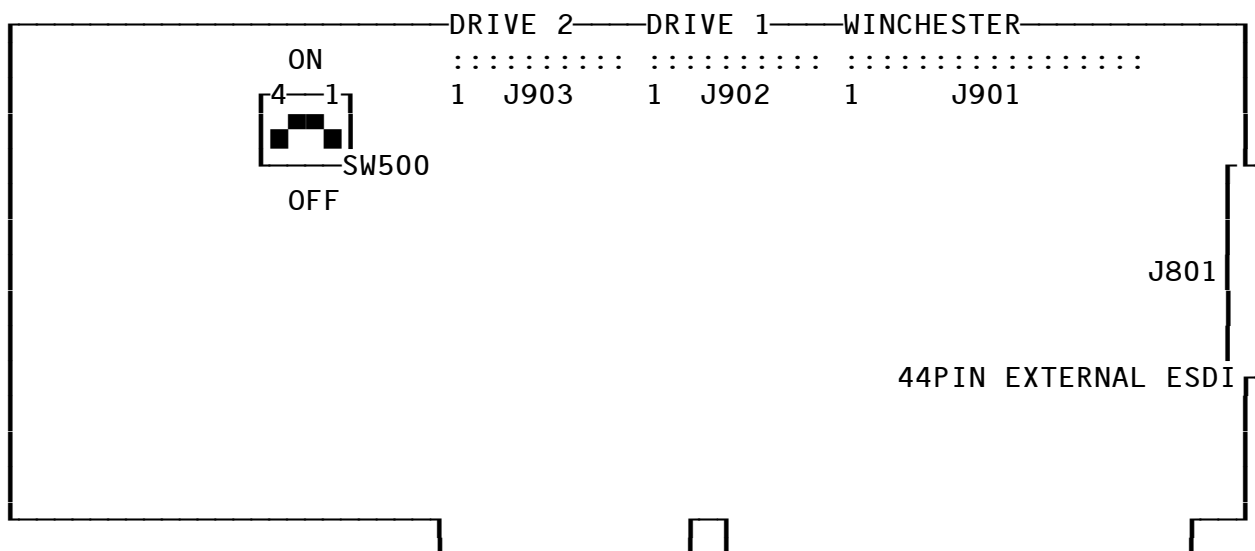

Switch Options

SW500

- 1 OFF: Primary hard disk controller address
ON: Secondary hard disk controller address
- 2 OFF — Hard Disk IRQ 15
3 OFF —
- 2 OFF — Hard Disk IRQ 14
3 ON —
- 2 ON — Hard Disk IRQ 12
3 OFF —
- 2 ON — Hard Disk IRQ 12
3 ON —
- 4 OFF: Factory default
ON: illegal

Board Connectors

J801	44-pin external cable ESDI connector fixed disk drive expansion unit
J903	20-pin data cable connector drive 2
J902	20-pin data cable connector drive 1
J901	34-pin control cable connector hard drive

Setup

Since there is no BIOS routine for the low-level-format, use of this controller card outside a Compaq machine may be risky, because low-level-formatting has to be done with drive setup software like DiskManager or SpeedStor. In this case, chances are high to delete the manufacturer's defect list on the last physical cylinder.